

# valor MADRONA FREESTANDING STOVE



**valor**  
Radiant Gas Fireplaces  
[www.valorfireplaces.com](http://www.valorfireplaces.com)



## MADRONA FEATURES

- ValorStat Plus handheld remote (*included*)
- Light/shut off pilot from remote control
- Program heat - modulating fire can adjust flame level for steady, even warmth
- Impressive low turndown - 6,500 BTU's
- No power, no problem - fully functional heater that doesn't require electricity or a fan
- 6 Hour Energy Saving Feature - Fire will turn down (to pilot light) automatically if there is no adjustment in flame height after six hours
- 5 Day Shutdown - After five consecutive days without flame adjustment (on pilot light), the fireplace will shut down automatically - saving energy and reducing operational costs
- Optional (clip-on) safety screen
- Top or rear vent convertible


### ABOUT OUR EFFICIENCY RATINGS

At Valor we use recognized Canadian and US government test methods for determining energy efficiency performance. This ensures our products will perform in your home as rated. Beware of misleading "steady state" efficiency claims made by manufacturers using their own "in-house" test methods. Visit [valorfireplaces.com](http://valorfireplaces.com) for more information.

## MADRONA SPEC INFORMATION

### Clearances:

12" from top | 5" from the back | 6" from each side.

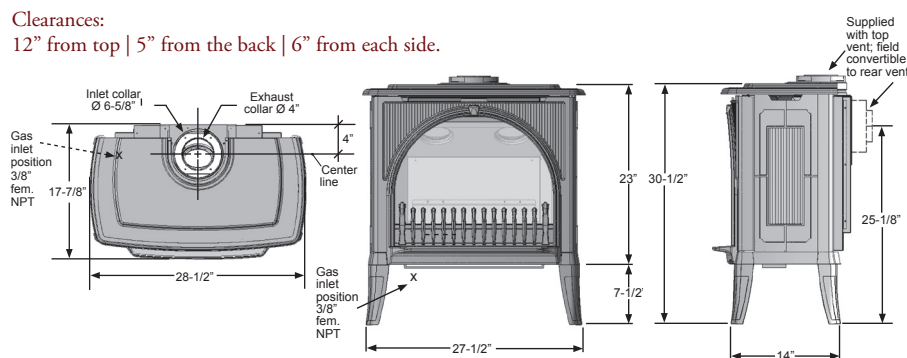

## MODEL/FUEL

| Model   | Fuel | Max. Input BTU/hr | Min. Input BTU/hr | EnerGuide Rating** | A.F.U.E. ++ | Max. Output (w/out fan) BTU/hr |
|---------|------|-------------------|-------------------|--------------------|-------------|--------------------------------|
| MF28ILN | NG   | 28,000            | 6,500             | 68.5%              | 71.3%       | 20,620                         |
| MF28ILP | LPG  | 28,000            | 14,500            | 69.5%              | 73.5%       | 21,185                         |

\*\* EnerGuide Ratings and Outputs have been determined without a fan/blower, using the CSA P4.1-02 test method

\*\* A.F.U.E. (Annual Fuel Use Efficiency) tested as per 10CFR - 430.23 Certified to ANSI Z21.88 / CSA 2.33 Vented Gas Fireplace Heater Standard CAN 1-2. 17 Gas Fired Appliances For Use at High Altitude

## CASTINGS & ACCESSORIES

|         |   |
|---------|---|
| MFCS01  | Madrona Casting - Black (2 castings - MFCS01-1 & MFCS01-2)                        |
| MFCS02  | Madrona Casting - Majolica Brown (2 castings - MFCS02-1 & MFCS02-2)               |
| MA28INK | Madrona Casting Natural Gas Conversion Kit  |
| MA28IPK | Madrona Casting Propane Conversion Kit  |
| MFDKSG  | Optional (Clip-on) Safety Screen  |
| 555CFK  | Optional Circulation Fan Kit (variable speed/thermally activated)                 |
| 556CLA  | Co-linear Adaptor Kit (converts co-axial flue to flex venting - rear outlet only) |
| 1265WSK | Optional Wall Switch Kit (light/turn off pilot and adjust flame level)            |

## VALOR ZONE & RADIANT COMFORT


Heating your entire home with a central forced air system wastes valuable energy and is often inefficient. An environmentally friendly and cost effective heat source alternative, Valor fireplaces provide steady, radiant warmth directly where you want it - when you want it.

## USE RADIANT HEAT SAFELY

Fireplace surfaces (in particular the glass window) are hot during operation and a period thereafter, resulting in a potential burning hazard. If small children are present, adult supervision is required. Also note, an optional safety screen and/or approved child barrier is strongly recommended. For further information please visit [www.valorfireplaces.com/safety](http://www.valorfireplaces.com/safety).



Madrona Freestanding Stove (shown in Majolica Brown Enamel)

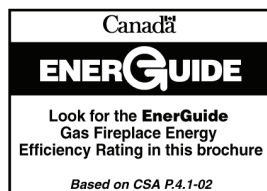

Designed and manufactured by:



Copyright Miles Industries Ltd. 2011

Proudly Made in North America

BRMADR11E

Printed on recycled paper